



Designation	L1	L2	L3	N1	N2	N3	β
TMKi0291-050	100	81	40	12	12	6	30°
TMKi0291-070	120	101	60	12	12	6	30°
TMKi0291-100	150	131	90	24	24	12	15°
TMKi0291-150	200	181	140	24	24	12	15°





Text:		ID number:	C171500-15
Original drawing		Change No.:	24.04.2024
Scale		Released:	24.04.2024
Format		Tolerances as per ISO 8015 : 2011	
4:5		Tolerances selon ISO 8015 : 2011	
A1		Dimensions without tolerance ISO	
		Dimensions sans tolérances 2788-mk	
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. (ISO 15015)			
ETEL		ETEL S.A. 2112 Möllers SWITZERLAND	
		Version / Revision / Sheet / Page	
		1375312-04-B-01	
		1 of 2	

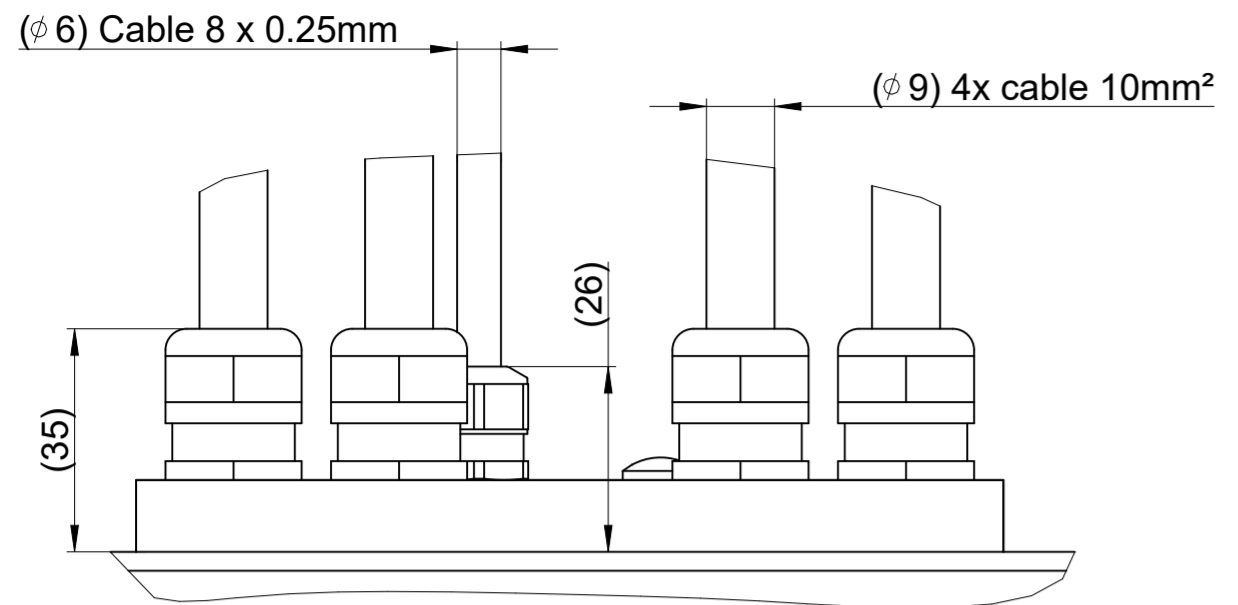



TMKi0291-###-VB#U#

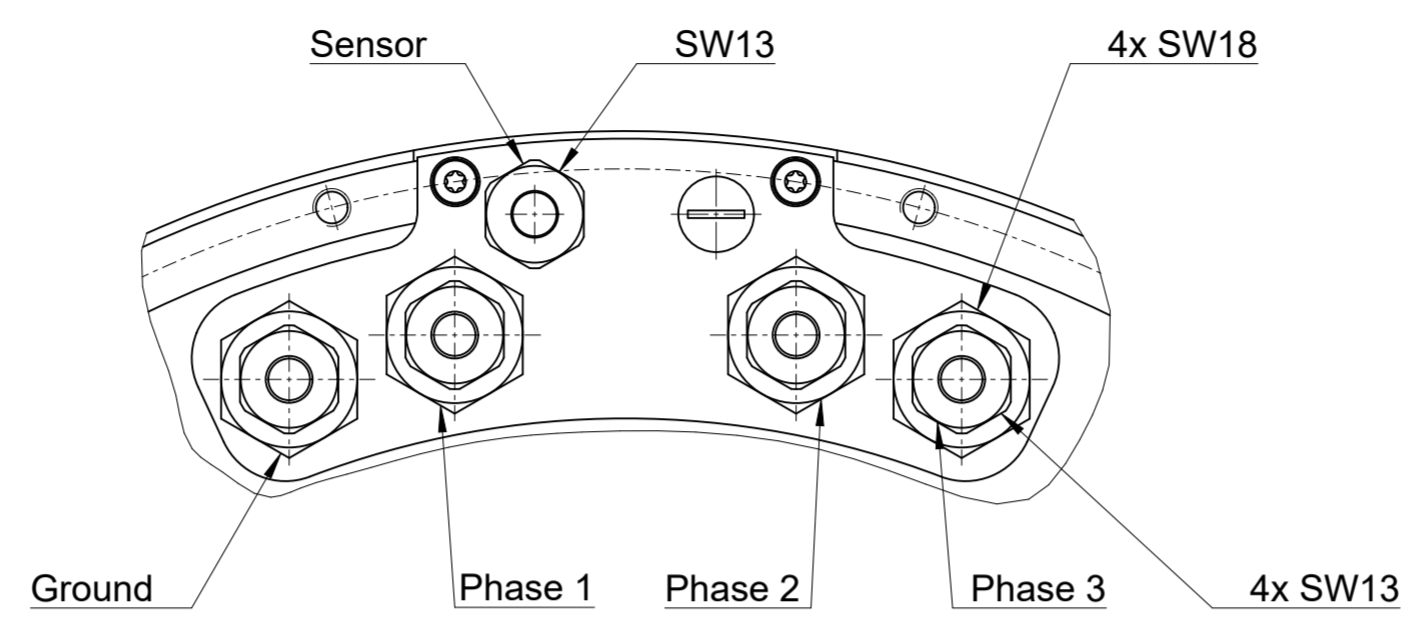




TMKi0291-###-VD#U#

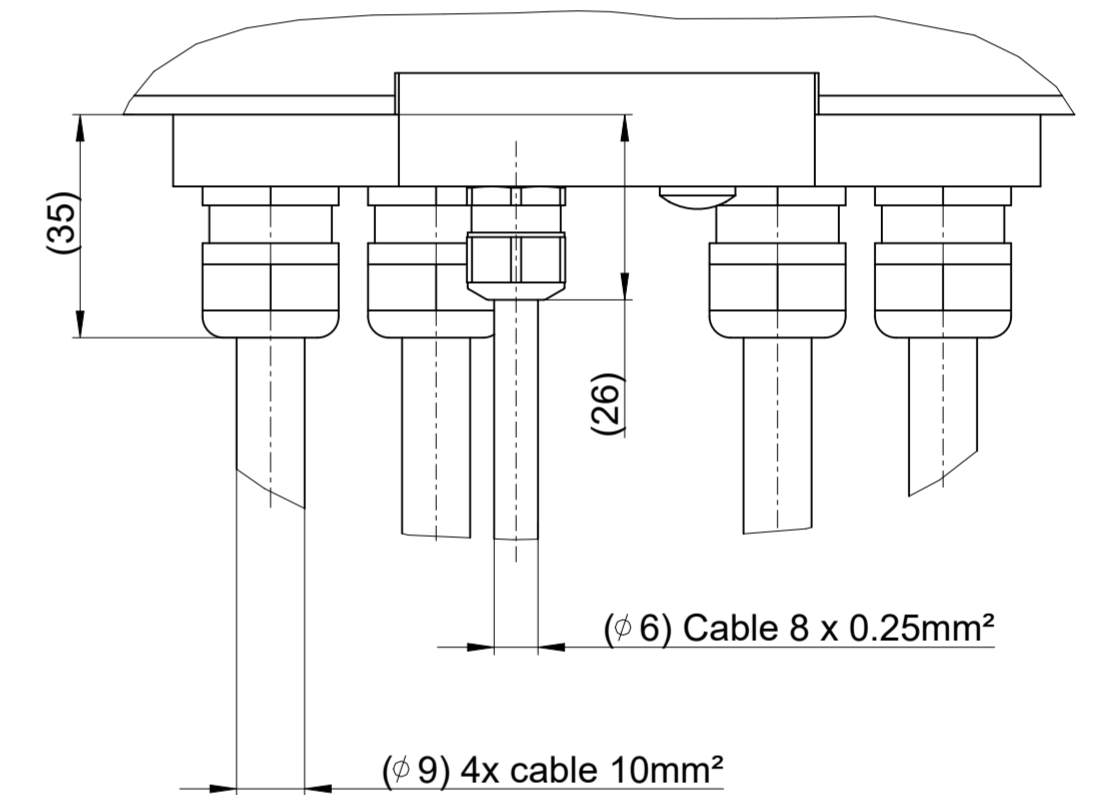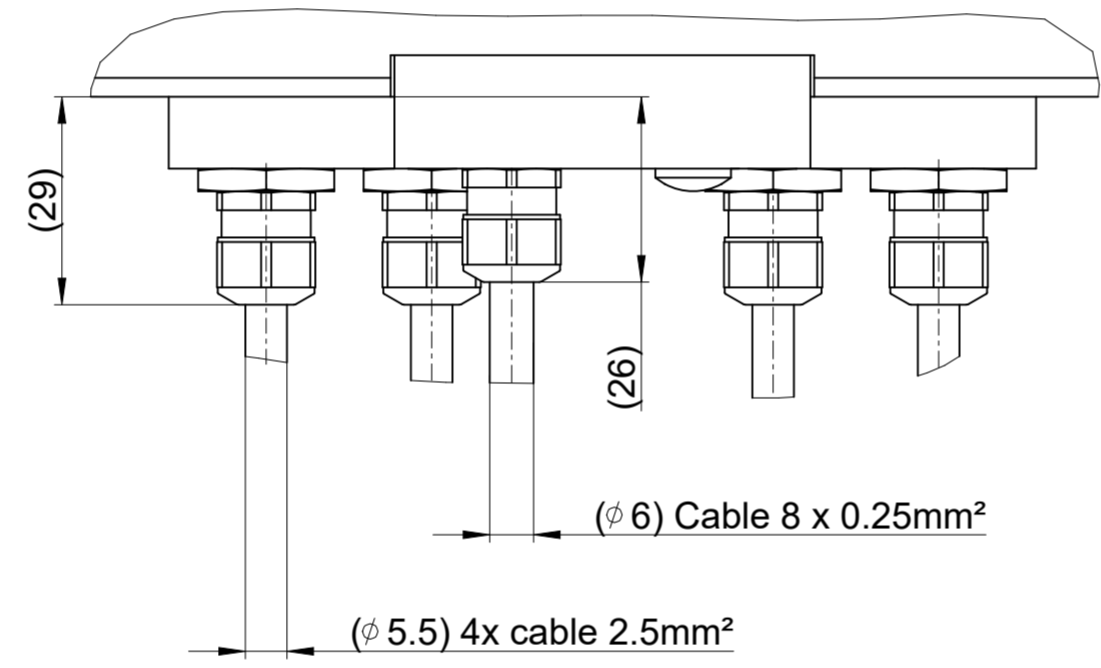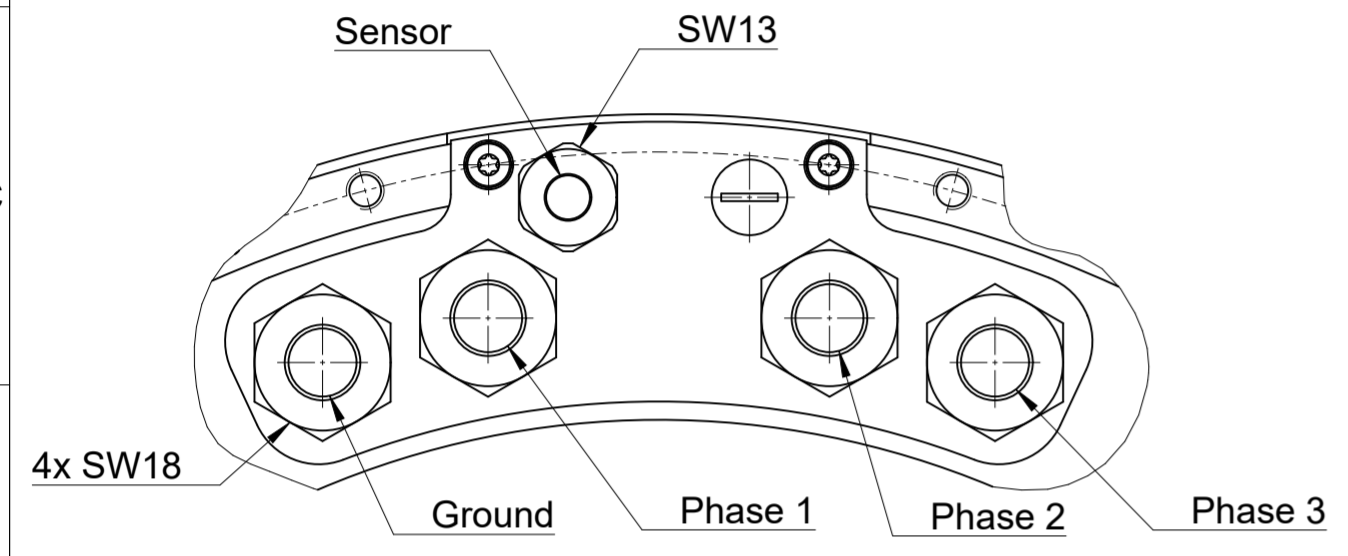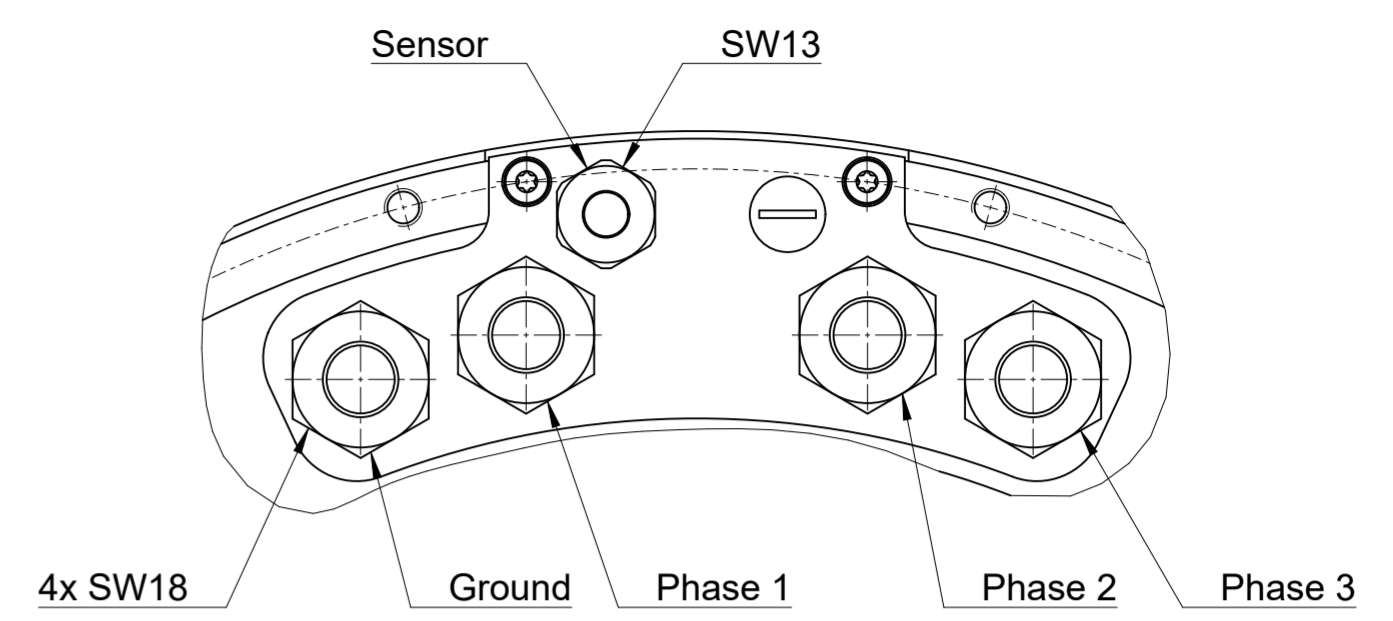

TMKi0291-###-XD#U#

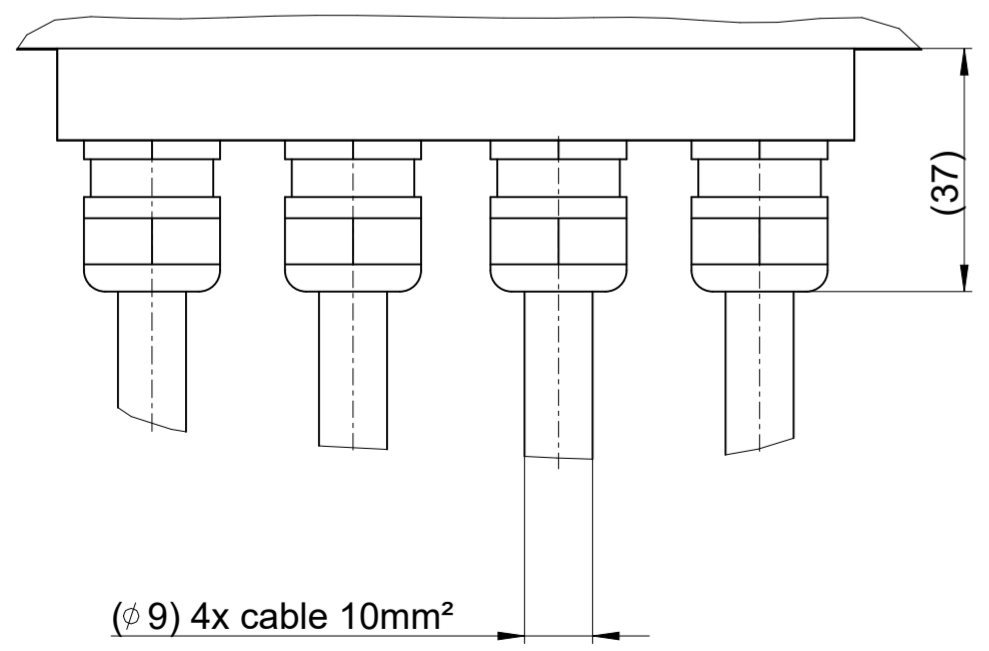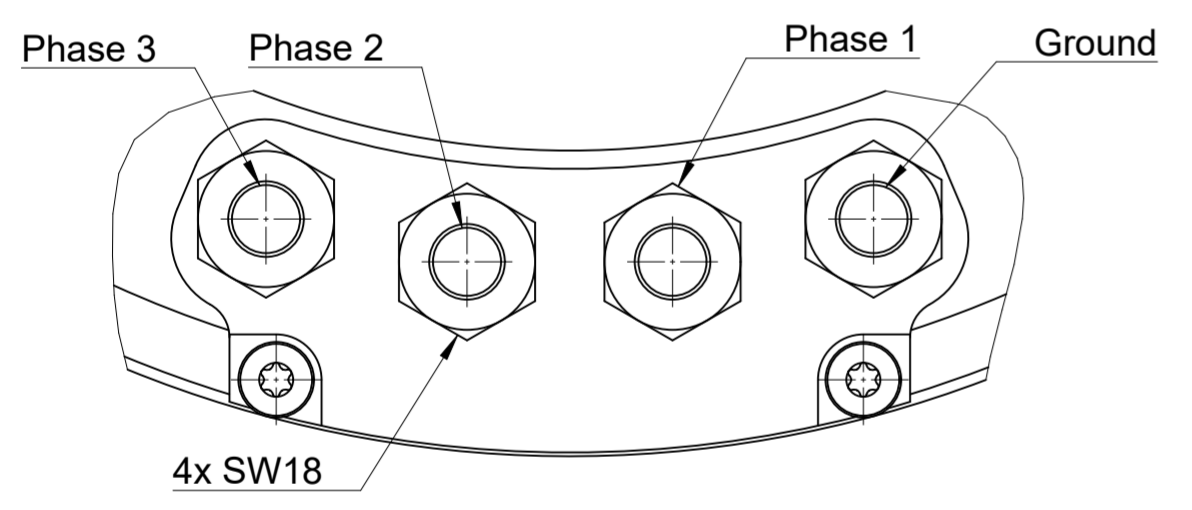

Text:		ID number:
Original drawing		Change No. C171500-15
Scale		Released: 24.04.2024
Format		Tolerances as per ISO 8015 : 2011
Dimensions in mm	1:1	Tolérances selon ISO 8015 : 2011
	A2	Dimensions without tolerance ISO 2768-mK
TMKi0291-###-#####-O#-AA5		Dimensions sans tolérances
TMKi0291-###-#####-O#-AA5		
Mating Dimensions / Cotes d'encombrement		
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. (ISO 16016)		
ETEL ETEL S.A. 2112 Môtiers SWITZERLAND		Version Revision Sheet Page
1375312-04-B-01		2 of 2
Document number		

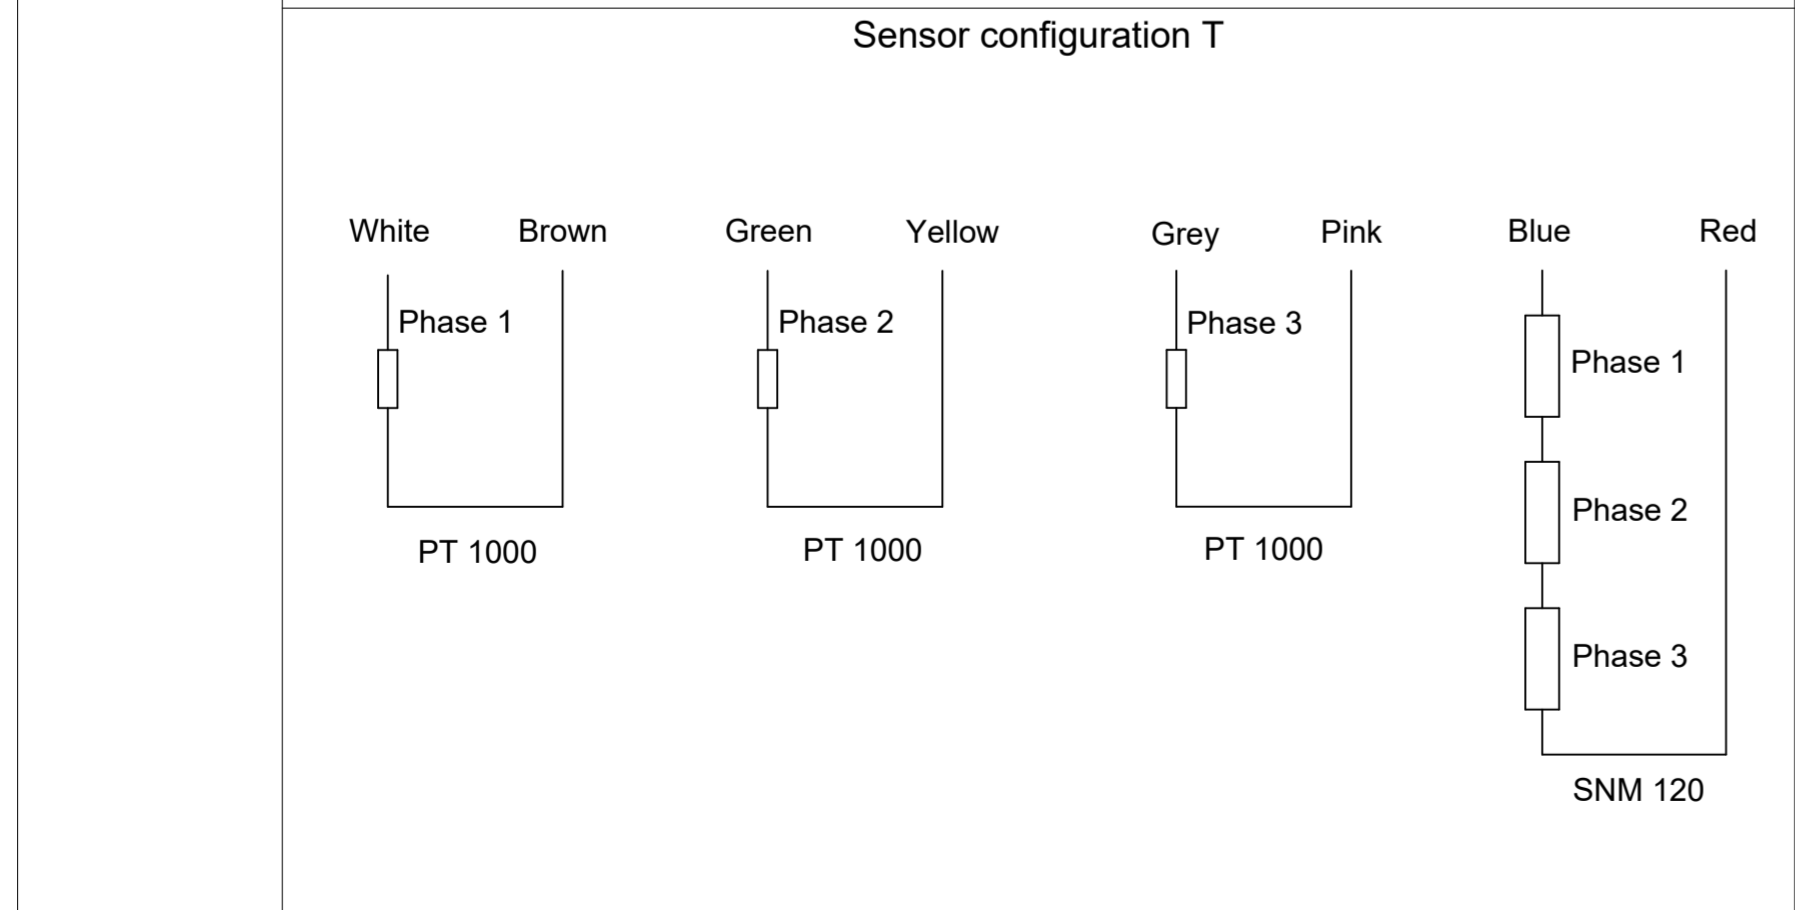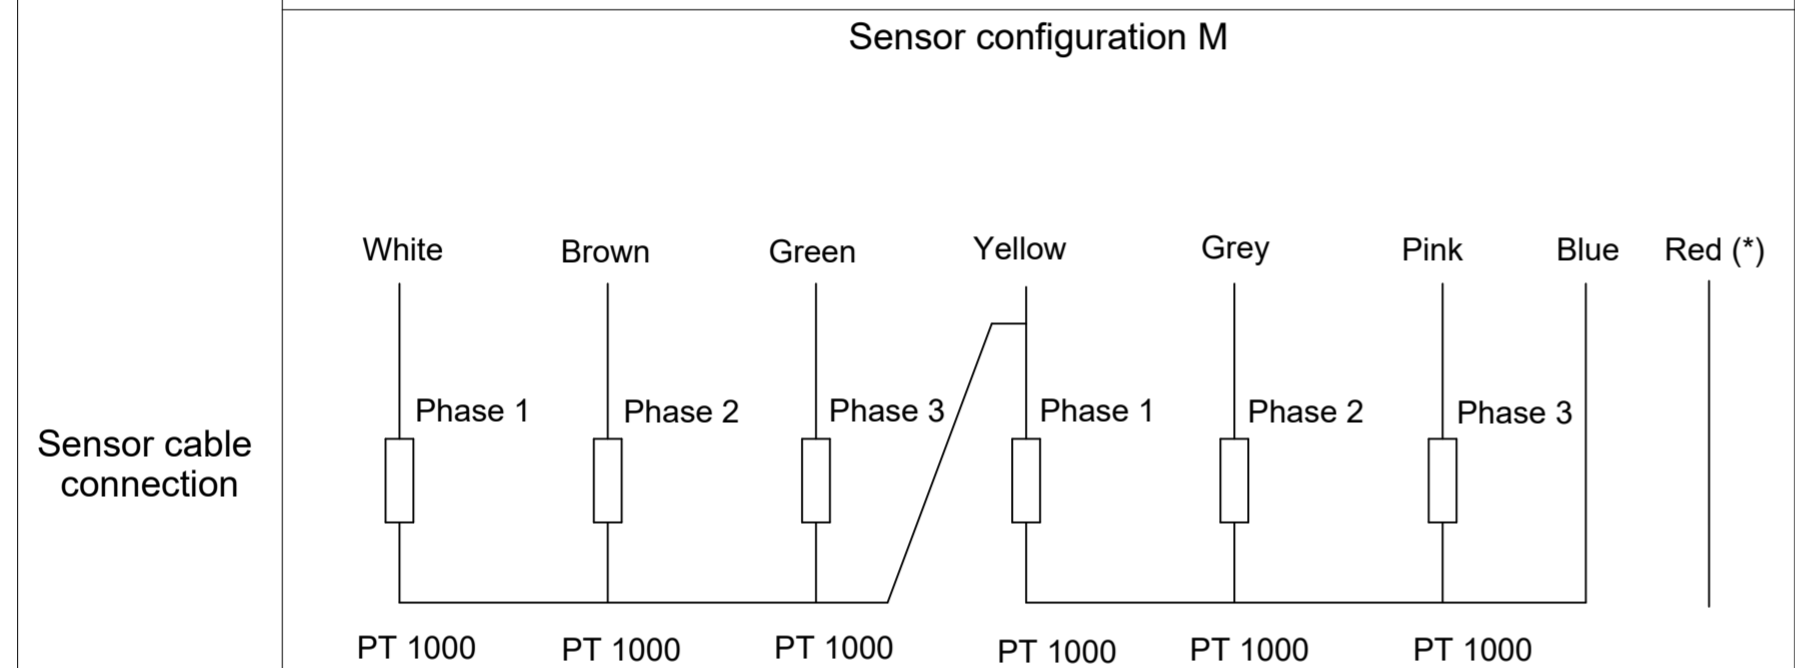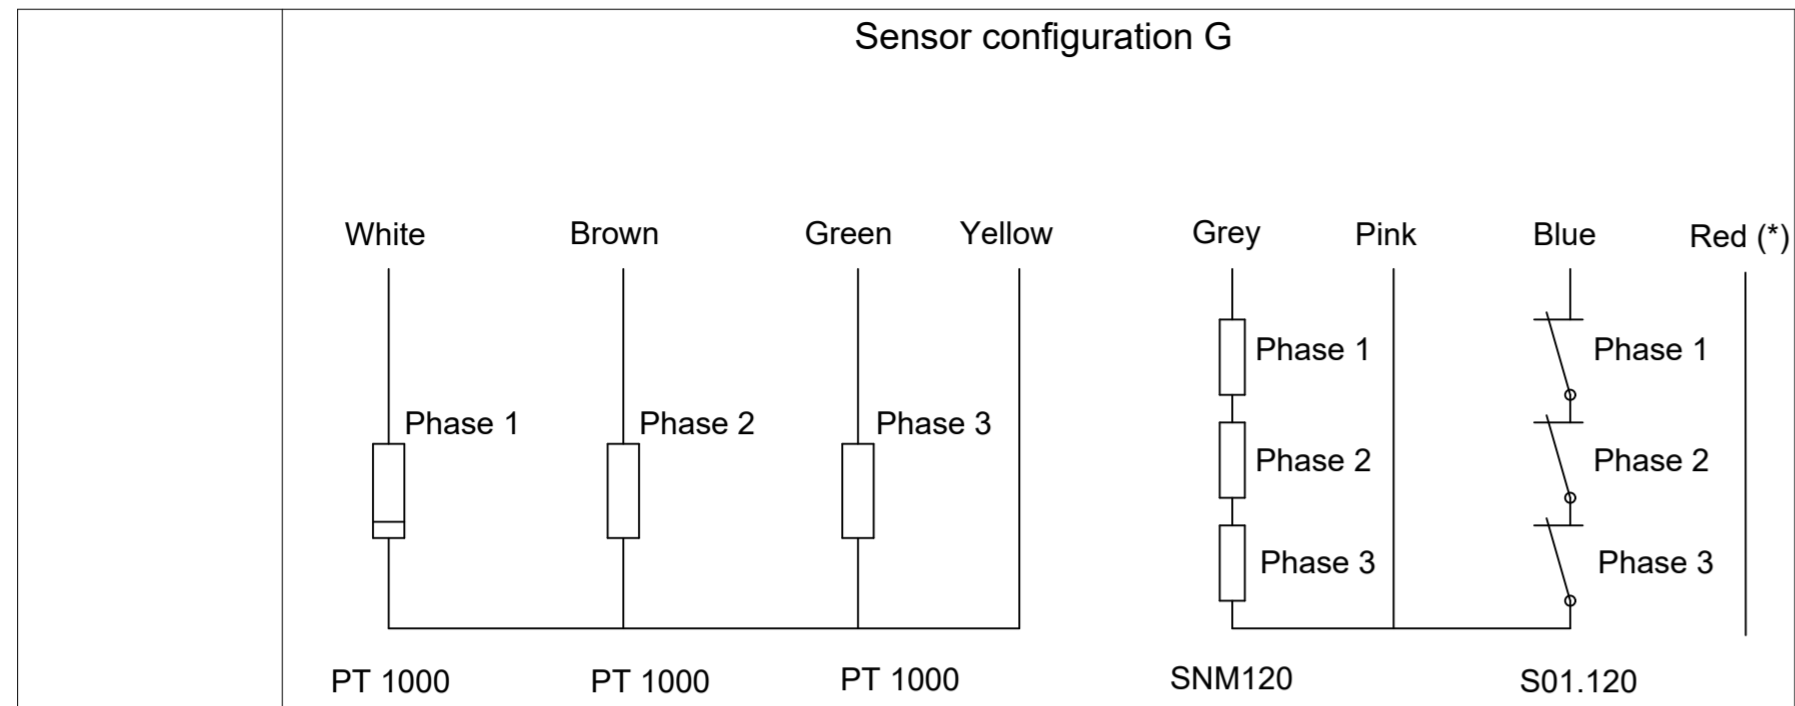


Power cable connection

Color and wire number	Function	Drawing
Black wire with number 1 or U	Phase 1 (PH1)	
Black wire with number 2 or V	Phase 2 (PH2)	
Black wire with number 3 or W	Phase 3 (PH3)	
Yellow and green wire	Ground (GND)	

Wire section (mm²)

Characteristics	1 x 2.5	1 x 4	1 x 6	1 x 10	1 x 16	Sensor cable
Applicable motors	TMKi0175 TMKi0291 TMKi0360	TMKi0360	TMKi0175 TMKi0360 TMKi0530	TMKi0291 TMKi0530 TMKi0761	TMKi0360 TMKi0530 TMKi0761 TMKi0991	All TMKi
Minimum bend radius for fixed cable	R = 4 X D	R = 4 X D	R = 4 X D	R = 4 X D	R = 4 X D	R = 6 X D
Minimum bend radius for moving cable	R = 7.5 X D	R = 7.5 X D	R = 7.5 X D	R = 7.5 X D	R = 7.5 X D	R = 12 X D

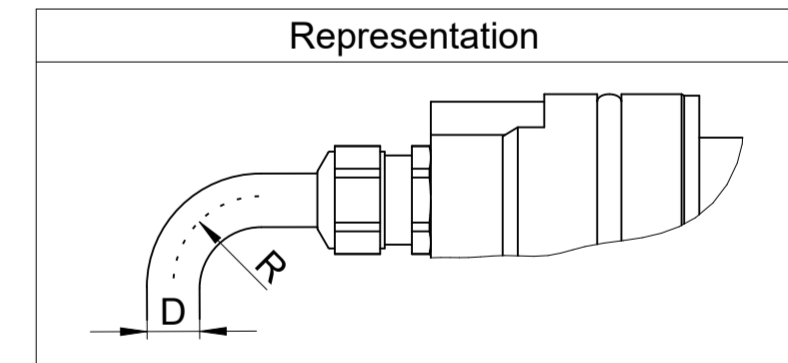

(*): Red wire (if present) is not connected on the motor side and cutted flush on cable extremity.

Text:		Original drawing Scale: 1:1 Format: A2		TMKi sensor config. and cables prop. (interface)		ID number	
RoHS		1:1 A2		TMKi config. capteur et prop. câbles (interface)		Change No. C138033-30 Released: 08.01.2024	
Workpiece edges ISO 13715 Arêtes de formes selon ISO 13715		General tolerances ISO 2768:1989-mK Tolérances générales ISO 2768:1989-mK		Surfaces as per ISO 1302:2002 Etats de surface selon ISO 1302:2002		Material: Matière:	
Dimensions in mm / Cotes en mm		Mating Dimensions / Cotes d'encombrement		Tolerances as per ISO 8015 : 2011 Tolérances selon ISO 8015 : 2011		Surface treatment: Traitement de surface:	
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. (ISO 16016)							
ETEL		ETEL S.A. 2112 Môtiers SWITZERLAND		Version/Revision/Sheet		Page	
1376587-00-B-01						1 of 1	
Document number							