

MOTOR PERFORMANCE		Winding codes	3QA			
		UNIT	FREE AIR COOLING			
Fp	Peak force	N	281			
Fc	Continuous force	N	66.6			
Fs	Standstill force	N	50.3			
Ip	Peak current	Arms	17.2			
Ic	Continuous current	Arms	2.56			
Is	Standstill current	Arms	1.94			
vs	Rated low speed	mm/s	0.20			
Pc	Power dissipation @ Ic	W	47.0			
Fd	Max. detent force (average to peak)	N	6.7			
Fa	Attraction force	N	580			


MOTOR SETTING		UNIT				
Kt	Force constant	N/Arms	26.9			
Ku	Back EMF constant (*)	Vrms/(m/s)	16.3			
Km	Motor constant	N/√W	12.0			
R20	Electrical resistance at 20°C (*)	Ohm	3.35			
L	Electrical inductance (*)	mH	14.9			
rth	Thermal time constant	s	1570			
Rth	Thermal resistance	K/W	2.32			
2tp	Magnetic period	mm	32			
mw	Magnetic way mass	kg/m	3.51			
mm	Motor mass	kg	0.587			

MOTOR ENVIRONMENT		UNIT				
Udc	Nominal DC bus voltage	VDC	600			
Gm	Mechanical gap	mm	0.90			
Ss	Stator exchange surface	m²	0.01			
x	Assumed stroke	m	0.29			
θamb	Ambient temperature	°C	20			
θmax	Maximum coil temperature	°C	130			

Notes: (*) terminal to terminal.
Hypotheses and tolerances are in ETEL handbook.

Caution: Any use of the motor beyond speed/torque limit could lead to hazardous voltage and serious injuries. Customer is responsible for setting safeties/limitations that will keep the motor in its safe operating area. ETEL cannot be held responsible if the motor is used in an improper way.

3QA - FREE AIR COOLING - 600V

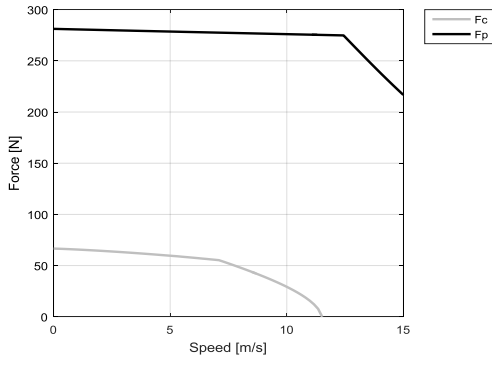

3QA - FREE AIR COOLING - 300V

